

Features

- Direct mount ISO5211 Full Port 316 stainless steel ball valve
- RTFE (reinforced Teflon) ball seats
- Triple PTFE/Viton live loaded stem seals, adjustable
- 1000 PSI working pressure at 100°F (38°C)
- Highly visual dome style valve position indicator
- Rugged aluminum Type 4X weatherproof enclosure
- Heavy duty motors with overload protection
- Anti-condensation heater, thermostatically controlled
- Manual override with end of travel mechanical stops
- Two auxiliary limit switches included (on-off models)
- EPS - Electronic Positioner System models available
- Actuator CSA listed per UL429 and CSA C22.2

Applications

On-off control of water, air, oil and other media compatible with the materials of construction. Steam service up to 25 PSI with optional high temperature mounting kit. Suitable for vacuum service up to 29"Hg. Actuator designed for 70% duty cycle.

Operation

Electric actuated valve uses power-to-open and power-to-close, stays in the last known position with loss of power. On receipt of a continuous voltage signal, the motor runs and via a rugged all metal gear system rotates the ball 90°. The motor is automatically stopped by internal cams striking limit switches. On receipt of a reversing continuous signal, the motor turns in the opposite direction reversing the valve position. Valves with EPS positioner use an analog input signal to control the position of the ball (flow). Wire directly to terminal strip via supplied cable connector, or use optional 1/2" NPT adapter.

Construction

Valve Body	316 stainless steel ASTM A351 CF8M
Ball/Stem	316 stainless steel
Ball Seats	RTFE (reinforced Teflon)
Stem Seals	PTFE/ (Viton)
Anti-static Device	Ball to Stem (1/4" - 2") + Stem to Body (1-1/2" - 2")
Gear Drive	Heavy duty alloy steel and aluminium bronze
Actuator Enclosure	Aluminum, polyester powder painted, Type 4X, IP67
Visual Valve Position Indicator	Clear polycarbonate cover, red/yellow open-closed
Fasteners	Stainless Steel
Auxiliary Limit Switches	2 x SPDT 3A@125/250VAC, 30VDC resistive load on-off actuators only



Description

Electric actuated 2-piece stainless steel full port ball valves are investment cast with unrestricted flow and minimum pressure loss. Adjustable live loaded stem seal packing helps compensate for wear, pressure and/or temperature fluctuations, extending the cycle life of the valve. Rugged corrosion resistant electric actuator includes a manual override, valve position confirmation switches (on-off), thermostatically controlled anti-condensation heater, and over-torque protection.

Approvals

Actuators

- CSA listed:
 - UL429
 - CSA C22.2 No. 139
 - Type 4X weatherproof enclosure
- CE conformance
 - ISO5211 mounting
 - IP67 weatherproof enclosure



Valves

- Design: API 608
- Testing: API 598/ EN12266-1
- Threaded Connection: ASME B1.20.1 (NPT)/ ISO 228-1/ BS21
- Pressure/Temperature Rating: ASME B16.34
- Marking: MSS SP-25

Construction Features

Auxiliary Limit Switches(2)
for confirming valve position,
on-off versions

Heavy duty integral motor
design significantly reduces
physical size of actuator

Rugged polyester powder
coated aluminum corrosion
resistant Type 4X weather-
proof enclosure.

Triple PTFE/Viton live loaded
stem seal design, adjustable

316SS Ball and Stem, RTFE
ball seats

Anti-Condensation Heater

Terminal Box, wire directly to
terminal strip via included
cable connector or optional
1/2" NPT conduit adapters.

Manual Override with
protective cover

Self-locking all metal gear
drive, no additional brake
required

Direct mount ISO5211
flange, no brackets required

Full Port 316 stainless steel
ball valve



Visual Valve
Position Indicator

Pressure-Temperature*

Pressure Rating: 1000 PSI (69 Bar), Vacuum 29inHg

Ball Valve Temperature Rating: -4 to 392° F (-20 to 200° C)

Actuator Temperature Rating: -13 to + 131° F (-25 to 55° C)

*See P/T chart

Pressure/Temperature Chart (PSI/°F)

P/T Chart						
PSI	1000	1000	1000	950	875	750
°F	0	50	100	150	200	250

Pressure/Temperature Chart (Bar/°C)

P/T Chart						
Bar	69	69	69	65.5	60	52
°C	0	10	38	66	93	121

Specifications: On-Off Valves (English units)

Stock Number	Pipe Size (NPT)	Orifice Size (inch)	Cv Flow Factor	Pressure Max.(PSI) *	Cycle Time/90° (seconds)	Voltage	Current (amps)	Electrical Drawing
120 VAC ELECTRIC ACTUATED STAINLESS BALL VALVES, ON-OFF version								
565202E	1/4	0.5	6.9	1000	25/21	110 VAC, 50/60Hz	0.27	B
565203E	3/8	0.5	6.9	1000	25/21	110 VAC, 50/60Hz	0.27	B
565204E	1/2	0.6	9.7	1000	25/21	110 VAC, 50/60Hz	0.27	B
565206E	3/4	0.8	18.4	1000	25/21	110 VAC, 50/60Hz	0.27	B
565208E	1	1.0	55.4	1000	25/21	110 VAC, 50/60Hz	0.27	B
565210E	1-1/4	1.3	89.7	1000	25/21	110 VAC, 50/60Hz	0.27	B
565212E	1-1/2	1.5	144.2	1000	25/21	110 VAC, 50/60Hz	0.27	B
565216E	2	2.0	226.0	1000	25/21	110 VAC, 50/60Hz	0.27	B
24 VDC ELECTRIC ACTUATED STAINLESS BALL VALVES, ON-OFF version								
565244E	1/4	0.5	6.9	1000	20	DC24	1.28	G
565245E	3/8	0.5	6.9	1000	20	DC24	1.28	G
565246E	1/2	0.6	9.7	1000	20	DC24	1.28	G
565247E	3/4	0.8	18.4	1000	20	DC24	1.28	G
565249E	1	1.0	55.4	1000	20	DC24	1.28	G
565250E	1-1/4	1.3	89.7	1000	20	DC24	1.28	G
565251E	1-1/2	1.5	144.2	1000	20	DC24	1.28	G
565252E	2	2.0	226.0	1000	20	DC24	1.28	G

* Pressure @ 100° F (see P/T chart for maximum pressure at higher temperatures)

On-Off Electric Actuated Valves

Valworx electric actuated valves use power-to-open and power-to-close, stays in the last known position with loss of power. The actuator will rotate the output drive 90° to open or close the ball valve. Limit switches automatically stop the motor drive in either the open or closed position as required.

Two auxiliary limit switches are provided as standard with on-off actuators to confirm valve open or closed position.

Rugged primary gear drive system is made of heat treated alloy steel for high strength, excellent wear resistance and high torque. Final stage aluminium bronze worm gear drive is self-locking, no motor brake required.

A manual override is provided for use in setup or power failure situations. The override is operated with a standard hex wrench (included).

The standard 4 watt thermostatically controlled anti-condensation heater will help prevent failures due to condensation buildup inside the actuator.

Robust aluminium alloy housing is corrosion-resistant, polyester powder coated, and weatherproof. The housing is rated Type 4X (IP67) and certified by CSA. Heavy duty motors are integral to the actuator housing. The actuator has the smallest physical size to power ratio of most actuators on the market.

Electrical wiring is directly to a terminal strip via cable connectors (included) or optional 1/2" NPT conduit adapters.

Specifications: Valves with EPS Positioners (English units)

Stock Number	Pipe Size (NPT)	Orifice Size (inch)	Cv Flow Factor	Pressure Max.(PSI)*	Cycle Time/90° (seconds)	Voltage	Current (amps)	Electrical Drawing
120 VAC ELECTRIC ACTUATED STAINLESS BALL VALVES with EPS POSITIONER 4-20mA input								
565255E	1/4	0.5	6.9	1000	25/21	110 VAC, 50/60Hz	0.27	E
565256E	3/8	0.5	6.9	1000	25/21	110 VAC, 50/60Hz	0.27	E
565257E	1/2	0.6	9.7	1000	25/21	110 VAC, 50/60Hz	0.27	E
565258E	3/4	0.8	18.4	1000	25/21	110 VAC, 50/60Hz	0.27	E
565259E	1	1.0	55.4	1000	25/21	110 VAC, 50/60Hz	0.27	E
565260E	1-1/4	1.3	89.7	1000	25/21	110 VAC, 50/60Hz	0.27	E
565261E	1-1/2	1.5	144.2	1000	25/21	110 VAC, 50/60Hz	0.27	E
565262E	2	2.0	226.0	1000	25/21	110 VAC, 50/60Hz	0.27	E
24 VDC ELECTRIC ACTUATED STAINLESS BALL VALVES with EPS POSITIONER 4-20mA input								
565265E	1/4	0.5	6.9	1000	30	DC24	1.0	GEY
565266E	3/8	0.5	6.9	1000	30	DC24	1.0	GEY
565267E	1/2	0.6	9.7	1000	30	DC24	1.0	GEY
565268E	3/4	0.8	18.4	1000	30	DC24	1.0	GEY
565269E	1	1.0	55.4	1000	30	DC24	1.0	GEY
565270E	1-1/4	1.3	89.7	1000	30	DC24	1.0	GEY
565271E	1-1/2	1.5	144.2	1000	30	DC24	1.0	GEY
565272E	2	2.0	226.0	1000	30	DC24	1.0	GEY

* Pressure @ 100° F (see P/T chart for maximum pressure at higher temperatures)

EPS - Electronic Positioning System

Valve positioning and how it works?

Valworx electric actuators with EPS- Electronic Positioning System provide an accurate valve positioning function whereby the movement of the actuator is controlled by a 4-20mA input control signal. Any change in the control input signal results in a corresponding and proportional change in the position of the actuator (valve).

This is achieved with a unique built in electronic positioning module. The module is fully potted to help protect the electronics from vibration and moisture resistance.

An internal microprocessor on the EPS circuit board continuously monitors the analog input and output signals and compares them to the physical position via a precision potentiometer feedback system, moving the actuator as required to balance the signals.

The EPS system is self-calibrating which virtually eliminates "hunting". The following functions are standard:

- Position monitoring output signal in same format as input. Ex: 4-20mA input, 4-20mA output
- Adjustable forward or reversing action.
- Deadband adjustment
- Selectable fail mode: fail closed, fail open or stop in place (for loss of input command signal).
- Electric manual control with onboard switches
- Fault LED lights indicate valve jam or signal loss
- Electronic brake function

Specifications: On-Off Valves (Metric units)

Stock Number	Pipe Size (NPT)	Orifice Size (mm)	Kv Flow Factor	Pressure Max.(Bar)*	Cycle Time/90° (seconds)	Voltage	Current (amps)	Electrical Drawing
120 VAC ELECTRIC ACTUATED STAINLESS BALL VALVE, ON-OFF Version								
565202E	1/4	11.5	5.9	69	25/21	110 VAC, 50/60Hz	0.27	B
565203E	3/8	12.5	5.9	69	25/21	110 VAC, 50/60Hz	0.27	B
565204E	1/2	15.0	8.4	69	25/21	110 VAC, 50/60Hz	0.27	B
565206E	3/4	20.0	15.9	69	25/21	110 VAC, 50/60Hz	0.27	B
565208E	1	25.0	47.9	69	25/21	110 VAC, 50/60Hz	0.27	B
565210E	1-1/4	32.0	77.6	69	25/21	110 VAC, 50/60Hz	0.27	B
565212E	1-1/2	38.0	124.7	69	25/21	110 VAC, 50/60Hz	0.27	B
565216E	2	50.0	195.5	69	25/21	110 VAC, 50/60Hz	0.27	B
24 VDC ELECTRIC ACTUATED STAINLESS BALL VALVE, ON-OFF Version								
565244E	1/4	11.5	5.9	69	20	DC24	1.28	G
565245E	3/8	12.5	5.9	69	20	DC24	1.28	G
565246E	1/2	15.0	8.4	69	20	DC24	1.28	G
565247E	3/4	20.0	15.9	69	20	DC24	1.28	G
565249E	1	25.0	47.9	69	20	DC24	1.28	G
565250E	1-1/4	32.0	77.6	69	20	DC24	1.28	G
565251E	1-1/2	38.0	124.7	69	20	DC24	1.28	G
565252E	2	50.0	195.5	69	20	DC24	1.28	G

* Pressure @ 38° C (see P/T chart for maximum pressure at higher temperatures)


Specifications: Valves with EPS Positioners (Metric units)

Stock Number	Pipe Size (NPT)	Orifice Size (mm)	Kv Flow Factor	Pressure Max.(Bar)*	Cycle Time/90° (seconds)	Voltage	Current (amps)	Electrical Drawing
120 VAC ELECTRIC ACTUATED STAINLESS BALL VALVES with EPS POSITIONER 4-20mA input								
565255E	1/4	11.5	5.9	69	25/21	110 VAC, 50/60Hz	0.27	E
565256E	3/8	12.5	5.9	69	25/21	110 VAC, 50/60Hz	0.27	E
565257E	1/2	15.0	8.4	69	25/21	110 VAC, 50/60Hz	0.27	E
565258E	3/4	20.0	15.9	69	25/21	110 VAC, 50/60Hz	0.27	E
565259E	1	25.0	47.9	69	25/21	110 VAC, 50/60Hz	0.27	E
565260E	1-1/4	32.0	77.6	69	25/21	110 VAC, 50/60Hz	0.27	E
565261E	1-1/2	38.0	124.7	69	25/21	110 VAC, 50/60Hz	0.27	E
565262E	2	50.0	195.5	69	25/21	110 VAC, 50/60Hz	0.27	E
24 VDC ELECTRIC ACTUATED STAINLESS BALL VALVE with EPS POSITIONER 4-20mA input								
565265E	1/4	11.5	5.9	69	30	DC24	1.0	GEY
565266E	3/8	12.5	5.9	69	30	DC24	1.0	GEY
565267E	1/2	15.0	8.4	69	30	DC24	1.0	GEY
565268E	3/4	20.0	15.9	69	30	DC24	1.0	GEY
565269E	1	25.0	47.9	69	30	DC24	1.0	GEY
565270E	1-1/4	32.0	77.6	69	30	DC24	1.0	GEY
565271E	1-1/2	38.0	124.7	69	30	DC24	1.0	GEY
565272E	2	50.0	195.5	69	30	DC24	1.0	GEY


* Pressure @ 38° C (see P/T chart for maximum pressure at higher temperatures)

Electrical Wiring


ON-OFF Valves AC Voltages

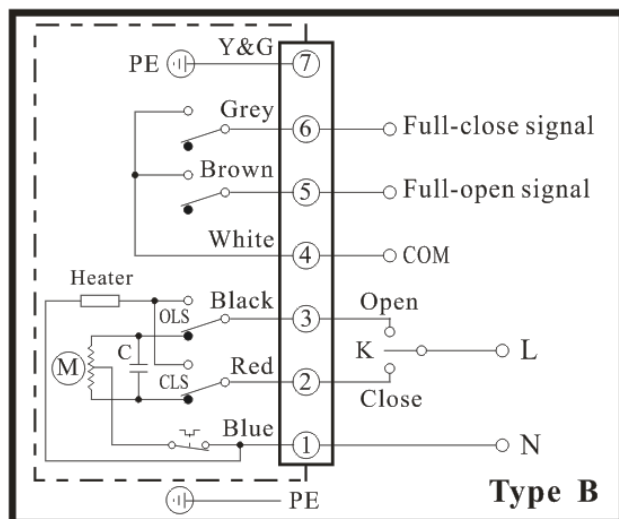


ON-OFF Valves DC Voltages

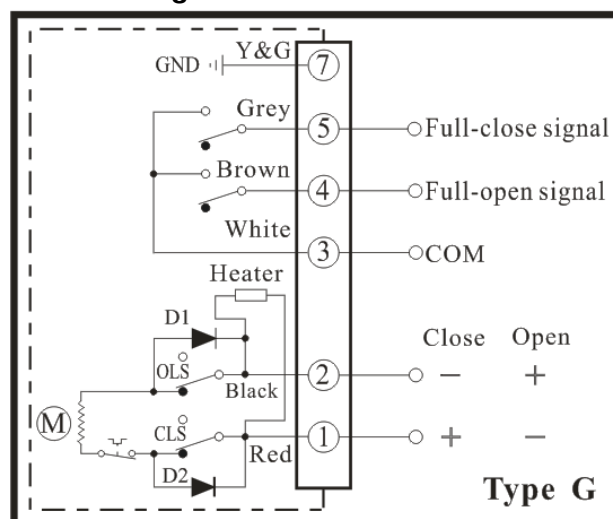


Valves with EPS Positioners AC Voltages

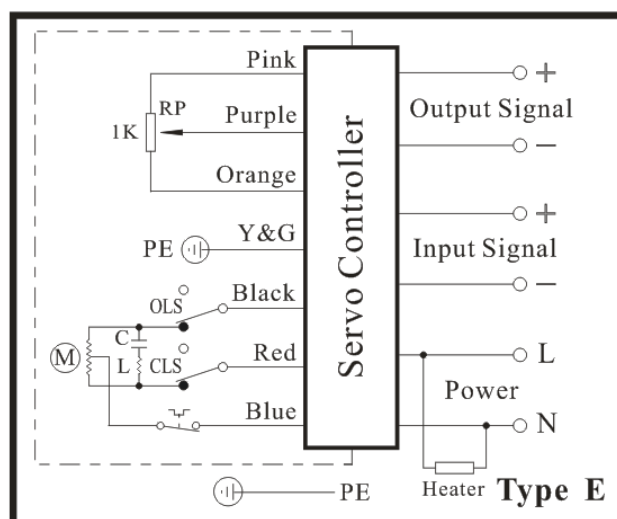

Valves with EPS Positioners DC Voltages

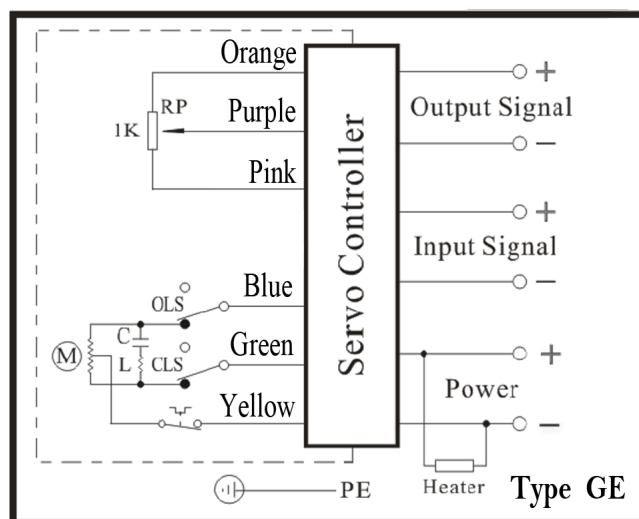

Dimensions

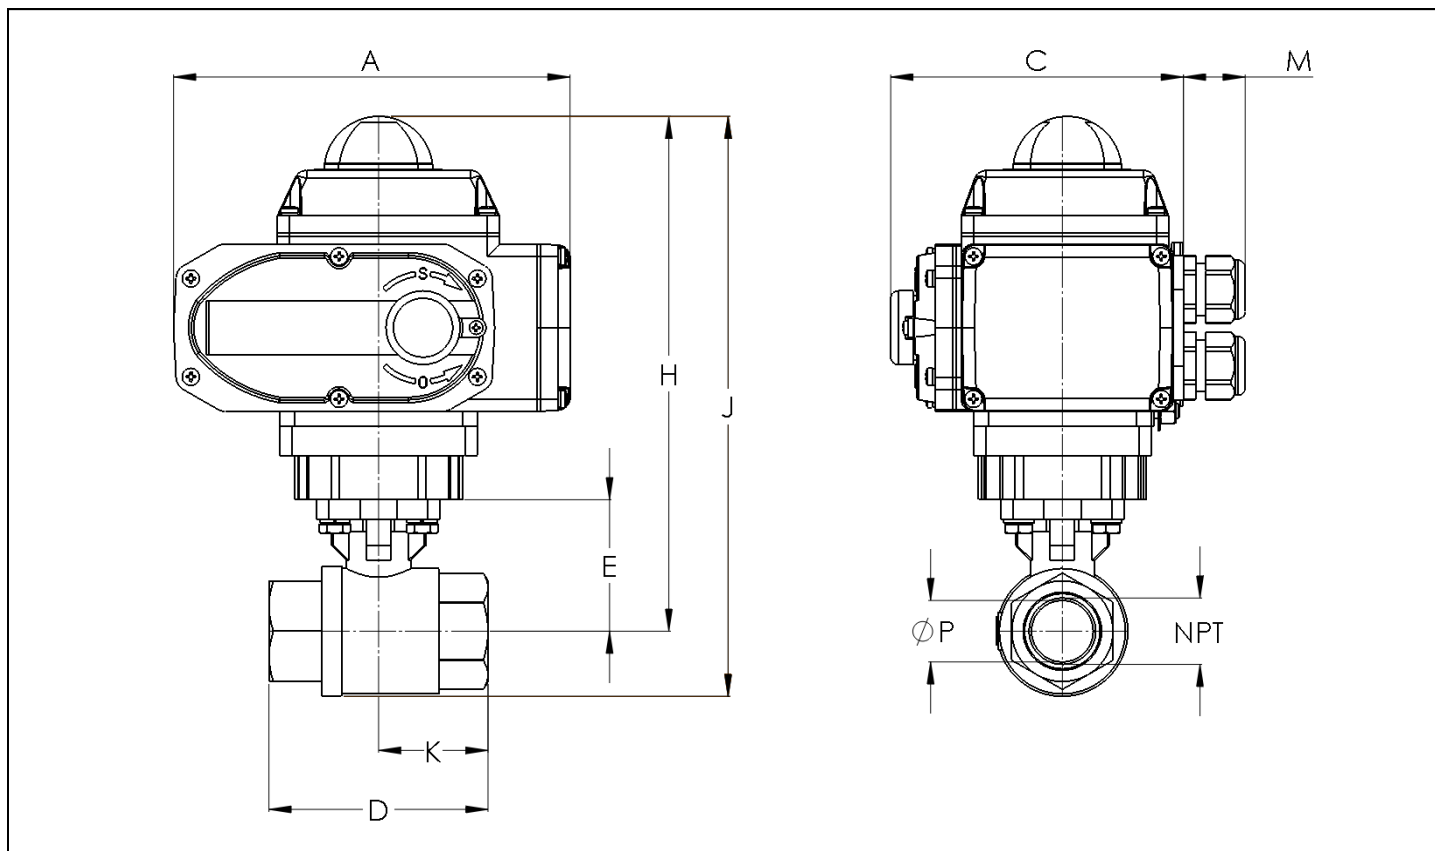

Pipe Size		A	C	D	E	H	J	K	M	P	Weight
1/4	inch	6.4	4.7	2.6	1.5	7.7	8.3	1.2	1.0	0.5	7.0 lb
	mm	162.0	118.5	65.3	37.0	195.6	210.8	31.0	25.0	11.5	3.2 kg
3/8	inch	6.4	4.7	2.6	1.5	7.7	8.3	1.2	1.0	0.5	6.9 lb
	mm	162.0	118.5	65.3	37.0	195.6	210.8	31.0	25.0	12.5	3.1 kg
1/2	inch	6.4	4.7	2.6	1.5	7.7	8.3	1.2	1.0	0.6	6.8 lb
	mm	162.0	118.5	65.3	37.0	195.6	210.8	31.0	25.0	15.0	3.0 kg
3/4	inch	6.4	4.7	3.0	1.8	8.0	8.8	1.5	1.0	0.8	7.2 lb
	mm	162.0	118.5	77.3	45.0	203.2	223.5	38.7	25.0	20.0	3.3 kg
1	inch	6.4	4.7	3.5	2.1	8.3	9.3	1.7	1.0	1.0	7.8 lb
	mm	162.0	118.5	88.7	53.5	210.8	236.2	43.8	25.0	25.0	3.5 kg
1-1/4	inch	6.4	4.7	4.0	2.3	8.5	9.8	2.0	1.0	1.3	8.9 lb
	mm	162.0	118.5	102.0	59.0	215.9	248.9	50.7	25.0	32.0	4.0 kg
1-1/2	inch	6.4	4.7	4.3	2.9	9.1	10.6	2.2	1.0	1.5	10.5 lb
	mm	162.0	118.5	109.0	74.8	231.1	269.2	55.0	25.0	38.0	4.8 kg
2	inch	6.4	4.7	4.9	3.3	9.5	11.3	2.4	1.0	2.0	12.8 lb
	mm	162.0	118.5	125.0	83.5	241.3	288.0	61.3	25.0	50.0	5.8 kg